


# Arduino Nixie Clock

## “Modular Rev3”

### Operating Instructions Firmware V352

Supported Models:

**Modular Revision 3**

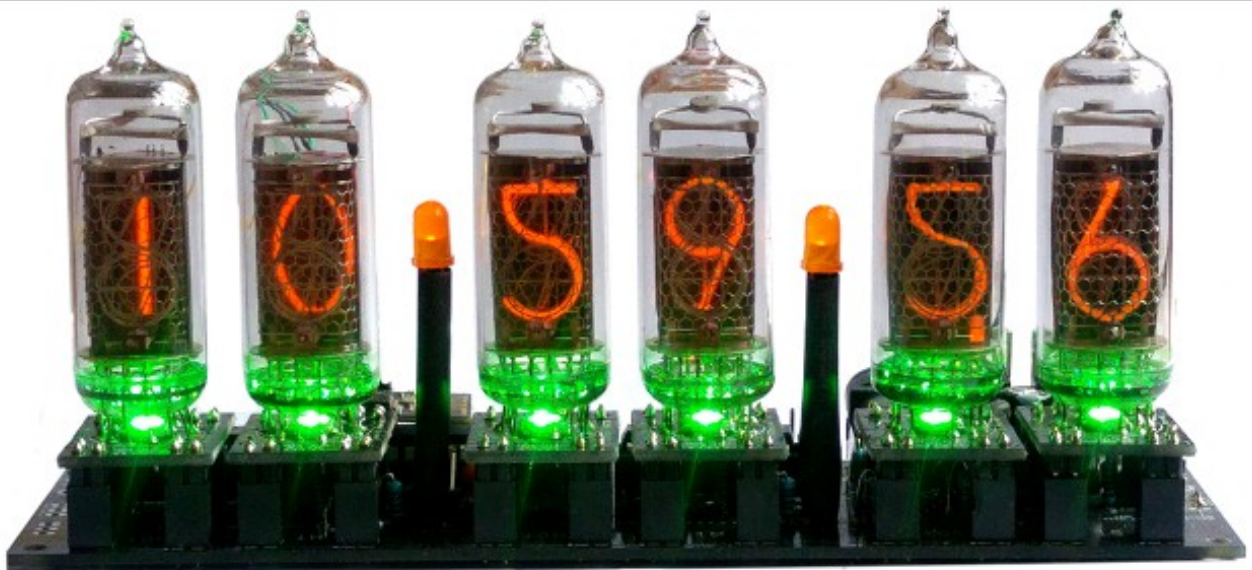

## About this document

This is the user instruction manual for the Nixie Clocks shown on the first page

- Modular Revision 3

If you want to have the construction manual to guide you through the process of building the clock, please find the appropriate manual at:

<https://www.nixieclock.biz/Manuals.html>

There should have been an exact link to the clock manuals on the packing slip you received in the package.

## Contact Information

If you want to get in contact with us, please email to:

[nixie@protonmail.ch](mailto:nixie@protonmail.ch)

We'll usually get back to you right away. We can help you with kits or construction.

We also offer discounts for direct purchases, we save the Ebay fees, and share this with you.

<http://www.open-rate.com/Store.html>

There is also a forum for the clocks, where you can find many answers to questions and contact others who are also using the clocks at:

<https://goo.gl/dQUYWx>

Which should redirect you to the much longer:

<https://www.tubeclockdb.com/component/kunena/12-arduino-nixie-clock-kit-support-forum.html>

## Description

The Arduino Nixie Clock is a beautiful mix of old and new, resulting in a high accuracy, low power clock which will be a talking point in your home.

The clock has the following features:

- Latest technology, highly reliable and accurate.
- Tried and tested design, with many hundreds of clocks sold.
- Based on the Arduino micro-controller: Easy to program and well documented.
- Low power consumption.
- Long tube life:
  - Anti Cathode Poisoning (ACP) and configurable blanking makes sure that the tubes will stay healthy for many years with no intervention from you.
  - Automatic blanking using a PIR (Passive InfraRed sensor) so that the tubes are turned off when no one is in the same room as the clock.
  - The multiplexed display and automatic dimming used in this design extends the life of the tubes indefinitely. Some other designs run the tubes too "hard", and this causes a rapid degradation in the useful life of the tube.
- All settings are stored in non-volatile memory. Once they are set, they are remembered forever, or until you change them again.
- RGB back lighting allows you to set the color of the back lighting to practically any color you desire. The back lights can show 16 million colours.
- Random RGB back lighting provides a constantly changing, subtle back lighting effect if you configure it.
- Ambient light sensing, with automatic tube dimming, which sets the tube and LED brightness according to the light conditions. This also increases tube life.
- Absolutely silent operation. Some Nixie clocks emit an irritating "buzz" or "hiss" which is especially annoying if you keep the clock in a bedroom.
- Automatic week day or weekend blanking, extends the life of tubes even further
- Automatic time of day blanking, can blank between a start hour and an end hour, on week days, weekends or every day
- Configurable suppression of Anti Cathode Poisoning when the clock is fully dimmed. In the middle of the night, all the digits lighting up at full brightness could be disturbing. You can choose to stop ACP when the clock is fully dimmed
- The High Voltage Generator auto-calibrates itself to match your tubes and power supply, meaning that the power consumption is the lowest possible. (Usually 2W when fully bright, 0.4W when blanked).
- Highly accurate when using RTC module:
  - Battery backed, temperature compensated, high accuracy clock. The accuracy is Accuracy  $\pm 2$ ppm from 0°C to +40°C. (Maximum 1 minute per year).
  - The battery life should be 3 years in normal use.
  - Retains the date and time even when turned off (not just for a few minutes, but for as long as the battery lasts)
  - Leap Year Compensation Valid Up to the year 2100
- Extremely accurate when using the on-board Wifi module:
  - The time never drifts, is always right to within 1 second.
  - Automatically compensates for Daylight Savings Time changes, leap years and seconds.
- The controller can be programmed without removing it from the board, by using the ICSP port on the board.

## Safety

The voltages produced in the High Voltage circuit can reach peaks of 400V! Take precautions not to electrocute yourself! If you are not sure what this means, please do not use this clock and return it for a full refund.

A shock from the clock high voltage circuit is at least a nasty bite. At worst it can kill you.

We decline any responsibility in the case of injury or death. You must be qualified to use this clock, it is not intended for anyone unqualified.

**REPEAT: If you are not sure what this means, do not use the clock!**

## General

The clock has different modes of operation, which you select using the pushbutton.

### First Start and calibration

When you start the clock up the very first time, it will start in "First Start Mode". This mode is intended to simplify the set up of the hardware. It cycles through the digits "0" - "9" and drives the High Voltage Generator with a basic setting which does no dimming.

To **EXIT First Start Mode, press the pushbutton when the display shows "88:88:88", and the clock will enter calibration mode!**

The clock will display "88:88:88" for several seconds. This is for the calibration of the High Voltage Generator to match the power adapter you have attached. During this time you might hear some faint crackling noises from the generator. This is normal.

After finishing the calibration, the version number (e.g. "03:52:00") will be displayed for about a second.

The clock will then go into normal operating mode.

You will use this function when you are building the High Voltage circuit.

For a video of the startup process, please see:

<https://youtu.be/XA3LOPLX8vI>

Once you have exited First Start Mode, it will not enter it again until you do a factory reset (See below).

### Clock Mode

After the first start, each time you start up the unit, the clock will go into normal clock mode and will display the time. In normal clock mode, the time will be displayed.

Every 10 minutes (at "xx:x9:15"), the clock will do "Anti-Cathode Poisoning", which will cycle all the digits for about 15 seconds.

This is not an error! It is important to keep the tubes healthy in the long term.

# Time Providers

The clocks can use either a battery backed RTC module or a WiFi module.

If you install both, the WiFi module will set the RTC module to keep it up to date. After 5 minutes when no information is received from the WiFi module, the clock will revert to using the RTC module.

## WiFi Time Providers

By default, the clock is designed to use a WiFi real time provider, which logs into your home WiFi network and periodically retrieves the time from Internet time sources. These are accurate to 1 second, and auto adjust for Daylight Savings Time. You configure once, and then the module remembers the configuration forever.

Additionally, the WiFi time module gives you a easy to configure interface, which you can use to set up the clock using a tablet, phone or computer.

## Real Time Clock

Optionally, the clock comes with a Real Time Clock (RTC) module which provides a battery backed time source that remembers the time even when the clock is not powered up. This is only necessary when the WiFi module is not available or cannot be connected to the internet.

## Internal Time Provider

Even if the case that no time provider is connected, the clock will continue to keep time, but in this case it uses the internal crystal of the clock's controller. In this case the clock will not be highly accurate, and will not remember the time if the clock loses power. This time provider is therefore not recommended.

# Overview

Normally the clock is in "Time Display Mode", which will show the time. If you press the button for differing lengths, different things will happen.

**"Short Press"** (less than 1 second): A temporary display will be shown for 5 seconds. This is useful if you want to know the date, for example. The options here are given in the section "Temporary Display Mode"

**"Medium Press"** (more than 1 second): The clock will go into "Setting Mode" to allow you to change settings. If you have the WiFi module, you can change settings using a browser.

**"Long Press"** (more than 8 seconds): The clock will go into "Tube healing mode". **Read the section on "Tube healing Mode" before using this mode.** This mode can damage your tubes if you don't use it correctly!

# Temporary Display Mode

Normally, the clock will show the time. To show additional information press the button with a “short” press. Each press cycles through the following information. After 5 seconds, the display will revert to the normal time display.

| Mode              | Description  | Values  |
|-------------------|--|---|
| Date              | <b>Date.</b> The current date will be shown in the date format you selected.   | Example<br>“17:06:18”   |
| Temp              | <p><b>Temperature / Time Provider Module status.</b></p> <p>SS (the seconds digits) can have 4 values:<br/>           “10”: The clock does not have a time provider installed, and is working off the internal time source. (Not accurate)<br/>           “11”: The clock has an RTC time source installed.<br/>           “12”: The clock has a WiFi time source installed.<br/>           “13”: The clock has a WiFi and an RTC time source installed</p> <p>In modes “11” and “13” the digits “TT:tt” (hours and minutes) will show the temperature, to the nearest ¼ degree, where “TT” is whole degrees, and “tt” is fractional degrees. In modes “10” and “12” the temperature is shown as “00:00:10” or “00:00:12”.</p> <p>The temperature shown is the current temperature inside the clock case in degrees Celsius. If this goes above 40, you should consider ventilating the case, because the temperature compensation is not able to work at such high voltages, and the clock life may be reduced.</p> | <p>“TT:tt:SS”</p> <p>Example:<br/>“22:25:13”</p> <p>Means<br/>“22.25 Degrees</p> <p>WiFi and RTC installed”</p> |
| LDR               | <b>Ambient Light Reading.</b> This shows the current ambient light reading from the LDR (light dependent resistor). It is a normalized value, and goes between 100 (dark) to 999 (bright). This controls the dimming of the tubes.   | <p>Example<br/>“01:00:--”</p> <p>100: darkest<br/>999: brightest</p>  |
| Version           | <b>Version Number.</b> Display the version number. The format will be :”VV vv 07”, where major version is “VV”, minor version is “vv” and the “21” is the id for the version display.  | <p>Example<br/>“03:51:--”</p>   |
| IP Address part 1 | <p>If you have the WiFi module connected, this will show the first two digits of the 4 digit IP address. Usually this address starts with “192.168”.</p> <p><b>Note:</b> The IP address is skipped if you do not have the WiFi module connected.</p>   | <p>Example:<br/>“19:21:68”</p> <p>= “192.168”</p>   |
| IP Address part 2 | <p>If you have the WiFi module connected, this will show the last two digits of the 4 digit IP address. Put this together with the value shown in IP Address part 1 to give the full address.</p> <p>You can enter the whole value into your browser to connect to the module. You must remove any leading “0” from the value. If you receive “192.168.001.106”, you must enter this as “192.168.1.106” into your browser address bar.</p>   | <p>Example:<br/>“00:11:06”</p> <p>= “001.106”</p>   |
| Mux Speed         | This shows the number of impressions per second, which is the refresh rate of the display. It varies a little based on the exact workload, but is usually about 100 impressions per second.  | <p>Example:<br/>“01:02:--”</p>  |

## Tube Decimal Points

If you have tubes with decimal points, they are used to indicate some status information. The meaning of the decimal points is shown in the table below.

| Tube        | Description   |
|-------------|---|
| 10s Hours   | <b>Not used</b>   |
| 1s Hours    | <b>PM Indicator:</b> If you are in 12H display mode, and time is PM, the “PM” indicator will show. Does not show in 24H mode.   |
| 10s Minutes | <b>Not used</b>   |
| 1s Minutes  | <b>Not used</b>   |
| 10s Seconds | <b>Using PIR Blanking:</b> The clock is using the PIR detector to set the blanking. Will only light after the first movement detection. It does not light up by default until the first movement is detected! |
| 1s Seconds  | <b>Movement Detected:</b> The detector is detecting movement right now.   |

# Setting Mode

**Note:** If you have the WiFi module connected, almost all of these settings can be configured using a browser! Connect to the address shown in the “IP Address” in the previous section.

To enter setting mode, press the button for more than 1 second (“medium press”). The “RGB back light” LEDs will start to flash white. The number of consecutive flashes indicates the mode you are in.

Each medium press of more than 1 second will move the setting mode onto the next. When you finish the setting modes, the clock returns to normal time display mode.

**To exit** the setting mode before going through all the options, press the button for more than 2 seconds (“long press”). The “RGB back light” LEDs will return back to their normal operation. Another way of exiting is to cycle through all of the setting options, after which you will return to time mode.

To change a setting, press the button for less than one second, and then release it (“short press”).

| Mode   | Description   | Values |
|--|---|--------|
|  | <p><b>Time mode.</b> This is the normal mode and displays the time. It is the normal start up mode of the clock. If you do nothing. The clock is in this mode.</p> <p>In this mode a short press cycles through the values given in “Time Display Mode”, but always returns to the standard time display after 5 seconds.</p> |        |
| <b>Time and Date Settings</b>  |   |        |
| <b>Note that the Time and Date settings will not be shown if the WiFi module is active! Instead you jump straight to the next section.</b> |   |        |
|  | <p><b>Set Hours.</b> Each short press will advance the hour. The hours roll over back to zero after reaching 12 or 24 (depending on the 12/24 hours mode).</p>  |        |
|  | <p><b>Set minutes.</b> Each short press will advance the minute. The minutes roll over back to 0 after reaching 59 minutes. Each time you set the minute, the seconds is reset to 0.</p>  |        |
|  | <p><b>Reset seconds.</b> Each short press will reset the seconds to 0, without changing the hours or minutes.</p>   |        |
|  | <p><b>Set Day.</b> Each short press will advance the day. The day roll over back to one after reaching the maximum number of days in the month.</p>   |        |
|  | <p><b>Set Month.</b> Each short press will advance the month. The month roll over back to zero after reaching 12.</p>   |        |
|  | <p><b>Set Year.</b> Each short press will advance the year. The year roll over back to 2015 after reaching 2099.</p>  |        |



| Mode                   | Description  | Values  |
|------------------------|--|---|
| <b>Basic Settings</b>  |  |   |
| "--:--:00"<br>flashing | <b>12 or 24 hour time.</b> The hours are displayed in 12 or 24 hour mode.  | "1" = 12 hour<br>"0" = 24 hour<br>default: 0  |
| "--:--:01"<br>flashing | <b>Blank leading "0".</b> Blank out the leading "0" from single digit hours.   | "1" = blank<br>"0" = don't blank<br>default: 0  |
| "--:--:02"<br>flashing | <b>Scroll back.</b> Use the scroll back (rapid count down) effect when changing from "9" to "0".   | "1" = enable<br>"0" = disable<br>default: 1   |
| "--:--:03"<br>flashing | <b>Fade.</b> Use cross digit fading.   | "1" = enable<br>"0" = disable<br>default: 1   |
| "--:--:04"<br>flashing | <b>Date format.</b> Set the format that the date is displayed in.  | "0" = YY.MM.DD<br>"1" = MM.DD.YY<br>"2" = DD.MM.YY<br>default: 2  |
| "--:--:05"<br>flashing | <b>Display blanking.</b> To preserve the tubes, you can set the display to be blanked.<br><br>Options: <ul style="list-style-type: none"> <li>"0" = "never": Don't use blanking.</li> <li>"1" = "Weekends": Blank at weekends.</li> <li>"2" = "Week days": Blank on week days.</li> <li>"3" = "Always": Always use blanking.</li> <li>"4" = "Hours": Blanks between the start and end hour every day.</li> <li>"5" = "Hours or weekends": This blanks all day during the weekends and between the start and end hour every other day.</li> <li>"6" = "Hours or week days": This blanks all day during the week days and between the start and end hour every other day.</li> <li>"7" = "Hours on weekends": This blanks between the start and end hour on weekends.</li> <li>"8" = "Hours on week days": This blanks between the start and end hour on week days.</li> </ul> | "0" = Don't blank<br>"1" = Weekends<br>"2" = Week days<br>"3" = Always<br>"4" = Hours<br>"5" = H <b>or</b> weekends<br>"6" = H <b>or</b> week days<br>"7" = H <b>on</b> weekends<br>"8" = H <b>on</b> week days<br>default: 0 |
| "--:--:06"<br>flashing | <b>Blanking Hour Start.</b> Hour blanking will start at this hour, on the days set by the Display Blanking Mode. <b>If the display blanking mode does not use hours, this setting is not shown.</b>  | Default: 00   |
| "--:--:07"<br>flashing | <b>Blanking Hour End.</b> Hour blanking will end at this hour, on the days set by the Display Blanking Mode. <b>If the display blanking mode does not use hours, this setting is not shown.</b>  | Default: 07   |
| "--:--:08"<br>flashing | <b>Anti Cathode Poisoning night suppression.</b> The ACP which runs during the night lights the digits up at full brightness, and some people might find this disturbing. Using this setting, you can stop ACP happening when the display is fully dimmed (e.g. at night).   | "1" = don't do ACP when dimmed<br>"0" = do ACP always<br>default: 0   |

| Mode                            | Description  | Values  |
|---------------------------------|--|---|
| <b>Special Effects Settings</b> |  |   |
| "--:--:09"<br>flashing          | <b>Use LDR.</b> If you disable the LDR, the tubes will always work at maximum brightness.  | "1" = enable<br>"0" = disable<br>default: 1   |
| "--:--:10"<br>flashing          | <b>Blank Mode.</b> You can set the tubes, the LEDs or both the tubes and the LEDs to be blanked when in blanking mode.   | "0" = tubes<br>"1" = LEDs<br>"2" = tubes and LEDs<br>default: 2   |
| "--:--:11"<br>flashing          | <b>Fade Speed Slower.</b> Each short press will make the fade speed between digits slower.   | Default: 50<br>Max: 200   |
| "--:--:12"<br>flashing          | <b>Fade Speed Faster.</b> Each short press will make the fade speed between digits faster.   | Min: 20   |
| "--:--:13"<br>flashing          | <b>Scroll-back Speed Slower.</b> Each short press will make the "scroll-back" speed slower.  | Default: 4<br>Max: 40   |
| "--:--:14"<br>flashing          | <b>Scroll-back Speed Faster.</b> Each short press will make the "scroll-back" speed faster.  | Min: 1  |
| "--:--:15"<br>flashing          | <b>Slots Mode.</b> You can have the date shown automatically once per minute for about 5 seconds.  | "1" = enable<br>"0" = disable<br>default: 1   |
| <b>PIR Settings</b>             |  |   |
| "--:--:16"<br>flashing          | <b>PIR Timeout Longer.</b> You can set the amount of time that the clock will wait before blanking the display, in seconds.  | Default: 300<br>Max: 3600   |
| "--:--:17"<br>flashing          | <b>PIR Timeout Shorter.</b> You can set the amount of time that the clock will wait before blanking the display, in seconds.   | Min: 60   |
| <b>Back Light Settings</b>      |  |   |
| "--:--:18"<br>flashing          | <p><b>Back Light Mode.</b> This sets the mode of the back light.</p> <p>"Fixed" mode will show the back light color according to the Red, Green and Blue channel intensities.</p> <p>"Pulse" will make the intensity of the back light "pulse", brightening for a second and then darkening for a second, but always respecting the relative intensities set by the Red, Green and Blue channel intensities.</p> <p>"Cycle" fades the back lighting randomly, and does not use the Red, Green and Blue channel intensities. These settings will be skipped if cycle mode is selected.</p> <p>"Colortime" sets the colour of the back light to match the digit display value.</p> <p>Options "0", "1", "2" and "6", do not dim with the bulbs. Options "3", "4" and "5" do.</p> | "0" = Fixed<br>"1" = Pulse<br>"2" = Cycle<br>"3" = Fixed/Dim<br>"4" = Pulse/Dim<br>"5" = Cycle/Dim<br>"6" = "Colortime"<br>"7" = "Colortime/ Dim"<br>default: 0 |
| "--:--:19"<br>flashing          | <b>Red Channel Intensity.</b> Sets the maximum intensity of the red channel back light. This will be dimmed according to the display dimming. <b>If you are in cycle mode, this setting will be skipped.</b>   | Default: 15<br>Max: 15<br>Min: 0  |

| Mode   | Description   | Values  |
|--|---|---|
| "--:--:20"<br>flashing   | <b>Green Channel Intensity.</b> Sets the maximum intensity of the green channel back light. This will be dimmed according to the display dimming. <b>If you are in cycle mode, this setting will be skipped.</b>              | Default: 15<br>Max: 15<br>Min: 0                  |
| "--:--:21"<br>flashing   | <b>Blue Channel Intensity.</b> Sets the maximum intensity of the blue channel back light. This will be dimmed according to the display dimming. <b>If you are in cycle mode, this setting will be skipped.</b>                | Default: 15<br>Max: 15<br>Min: 0                  |
| "--:--:22"<br>flashing   | <b>Cycle Speed.</b> If you are in cycle mode, this controls the speed at which the colors cycle. The higher the number, the slower the colors will change. <b>If you are not in cycle mode, this setting will be skipped.</b> | Default: 10<br>Max: 64<br>Min: 4                  |
| <b>HV Generation Settings (See "HV Settings" note) – Not in online configuration</b> |   |   |
| "--:--:23"<br>flashing   | <b>HV Target Voltage Higher.</b> Each press sets the HV target voltage higher by 5V.  | Default: 180<br>Max: 200<br>Min: 150              |
| "--:--:24"<br>flashing   | <b>HV Target Voltage Lower.</b> Each press sets the HV target voltage lower by 5V.  |   |
| "--:--:25"<br>flashing   | <b>PWM On Time Longer.</b> This setting controls how long the PWM On pulse is. Normally you should not have to change this, but you can try changing this is the HV generation is noisy or you have unusual tubes.            | Default: 150<br>Max: 50<br>Min: 500               |
| "--:--:26"<br>flashing   | <b>PWM On Time Shorter.</b> This setting controls how long the PWM On pulse is. Normally you should not have to change this, but you can try changing this is the HV generation is noisy or you have unusual tubes.           |   |
| "--:--:27"<br>flashing   | <b>Increase Minimum dim.</b> This setting allows you to increase the minimum brightness you want to have when the clock is fully dimmed.  | Default: 100<br>Max: 500<br>Min: 100              |
| "--:--:28"<br>flashing   | <b>Decrease Minimum dim.</b> This setting allows you to decrease the minimum brightness you want to have when the clock is fully dimmed.  |   |
| "--:--:29"<br>flashing   | <b>Increase Anti-ghosting.</b> This setting reduces "ghosting" (the number on the right shows faintly on the digit on the left). This is due to transients when switching.  | Default: 0<br>Max: 50<br>Min: 0                   |
| "--:--:30"<br>flashing   | <b>Decrease Anti-ghosting.</b> This setting reduces "ghosting" (the number on the right shows faintly on the digit on the left). This is due to transients when switching.  |   |
| "--:--:31"<br>flashing   | <b>Use PIR pull-up.</b> If you want to use a 3V3 PIR module (or perhaps a 3V3 microwave module), you might have to turn off the internal pull up resistor. This setting allows you to do that.                                | "1" = 5V or no PIR<br>"0" = 3V3 PIR<br>default: 1 |

| Mode  | Description   | Values |
|---|---|--------|
| <b>Information Settings – Not in online configuration</b>   |   |        |
| <div data-bbox="161 264 296 304" style="border: 1px solid black; padding: 2px;">"--:--:32"</div> flashing | <b>Current case temperature.</b> Show the current temperature inside the case (used as part of the temperature compensation for the clock crystal). Note: This will show 0 if the RTC is not installed. |        |
| <div data-bbox="161 380 296 421" style="border: 1px solid black; padding: 2px;">"--:--:33"</div> flashing | <b>Clock version.</b> Show the clock software version.  |        |
|   | <b>Digit Test.</b> Will roll through all digits on all locations to check that the display is healthy.  |        |

**Note “HV Settings”:** Before leaving the clock for long periods with a new “HV Generation” setting, check that neither the MOSFET nor the voltage regulator is running too hot. If either of these components gets too hot, adjust the high voltage settings or add a heat sink. If you want to revert the clock to previous settings, perform a “Factory Reset”.

## Display Blanking Mode

During display blanking mode the tubes will be off depending on the display blanking settings, but the LEDs will continue to work as usual, telling you that the clock is still running.

You can configure the display to blank at weekends, during week days, always or never (the default). Also you are able to define hours during which to blank. For example I have a setting saying that the clock is blanked on weekdays between 7am and 4 pm, while I am out at work. At weekends, the display runs all the time.

You are also able to override the blanking. Press the button while the clock is blanked, and the display will come on again. Pressing the button will display the time for about a minute (60 seconds, but the display is only blanked on the minute change).

If you press the button multiple times within 5 seconds, the blanking will stay off for longer periods:

- 1 Press: 10 seconds
- 2 Presses: 1 hour
- 3 Presses: 4 hours

## PIR / Microwave Motion Detector Blanking

If you have a PIR or microwave motion detector installed, you can have the clock blank while there is no motion near it, and have it turn on only when someone is near the clock to see it. This saves power and greatly extends tube life, especially if the clock is in a location such as a bedroom.

If you connect a motion detector to the pin on the header (it is optional, and the clock works correctly without it), the usual blanking mode will be disabled and the PIR blanking mode will be used instead. If you want to use normal blanking mode, remove the detector and restart the clock.

## Tube Healing Mode

After a long period of time, tube filaments which are not often used (e.g. the "9" on the tens of hours or minutes) can get dim, despite the ACP that is regularly done.

If you make a "long" press of the button (more than 8 seconds), the clock will enter filament healing mode. All the power will be placed through a single filament of a single digit to clean it. A short press will change the selected filament.

Another super-long press or cycling through all the filaments will return the clock to normal.

**Caution!** Don't leave a single filament in this state for an extended period of time. It is a harsh process, and may damage the tube if you leave it in this mode for too long. Normally a few seconds minutes will restore the cathode digit.

Normally you will not need to use this mode! It is only there for tubes that are already in trouble. **Don't make a habit of using this mode!**

## **Factory Reset**

To reset the clock back to initial settings, hold down the button while powering on. The LEDs will rapidly flash some colours to signal that the reset has been done.

Everything will be reset back to the factory default state, and the clock will go back to "First Start Mode".

## **External power supply**

The perfect voltage for the external power supply is 7.5V or 9V DC. You can use 12V DC.

If you use more than 12V be aware that you might have to provide a heat sink for the power components and adjust the HV voltage generation. It is not advised to use more than 12V.

The absolute maximum permissible is 16V DC. Higher voltages than this will surely damage the clock.

Revisions:

V0348: 22Jun2017: Split user manual and construction manual

V0351: 05Dec2017: Add pull up setting

V0352: 15Jun2018: Update for V352, general manual update